
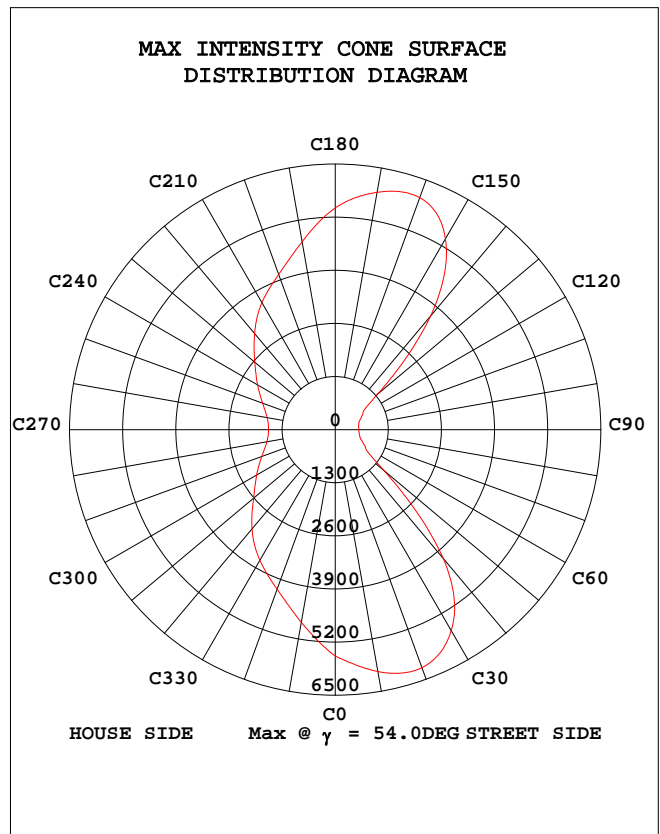


**STREETLIGHT PHOTOMETRIC TEST REPORT**

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 154.37 lm/W			
MODEL	ST-52-100W	I <sub>max</sub> (cd)	6201	η street_up(%)	0.0
NOMINAL POWER(W)	100	LOR(%)	100.0	η street_down(%)	52.2
RATED VOLTAGE(V)	100-240	TOTAL FLUX(lm)	15377	η house_up(%)	0.0
NOMINAL FLUX(lm)	15376.9	MAXIMUM @(C,γ )	20,54.0	η house_down(%)	47.8
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	220	η down(%)	100.0	SLI	21.449

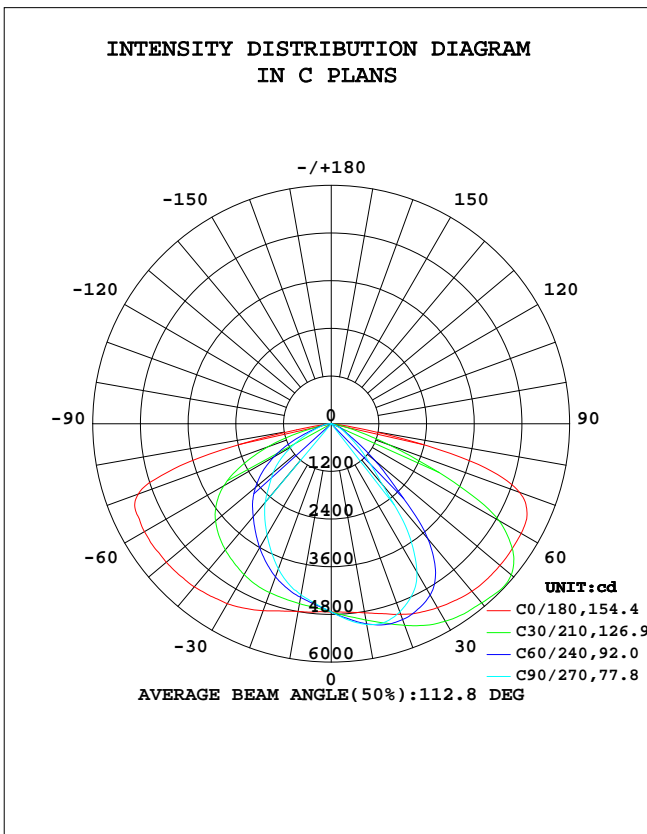


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

**STREETLIGHT ISOCANDELA DIAGRAM**

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SR.:	Shielding Angle:N/A

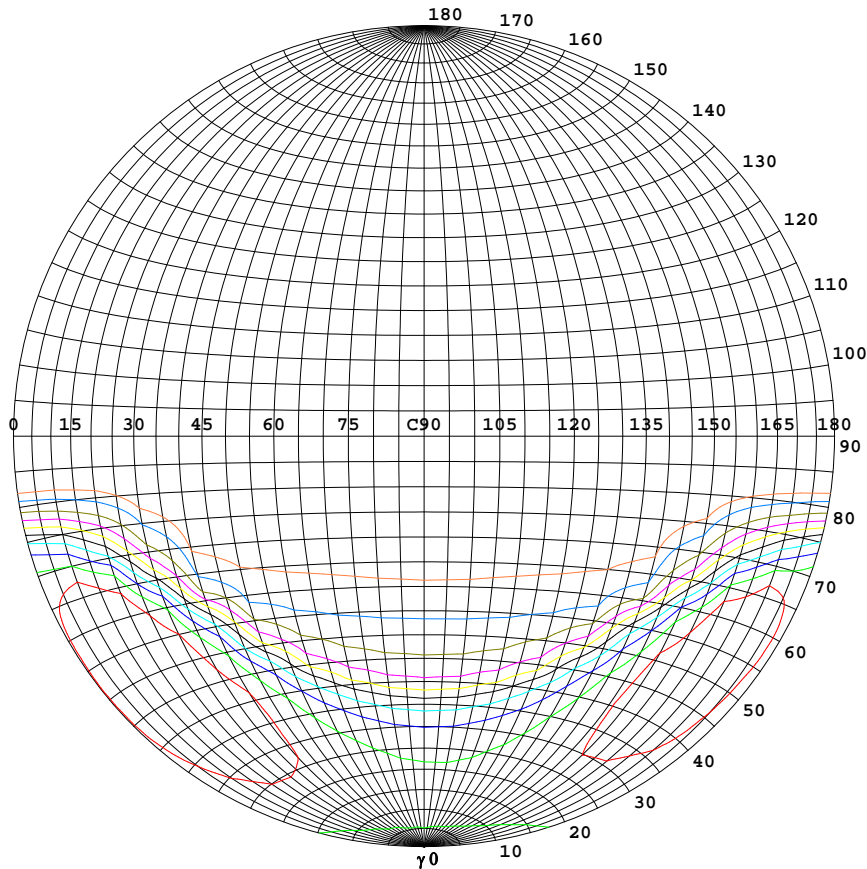

**Classification:**



IES:Type VS - Short  
 CIE:Narrow - Short  
 IES:Full cut-off  
 CIE:Semi-cut-off  
 Max.At80:58.67cd/klm  
 Max.At90:0cd/klm  
 Max.80-90:58.67cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	6201
90%	5581
80%	4961
70%	4341
60%	3721
50%	3101
40%	2481
30%	1860
20%	1240
10%	620
5%	310

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

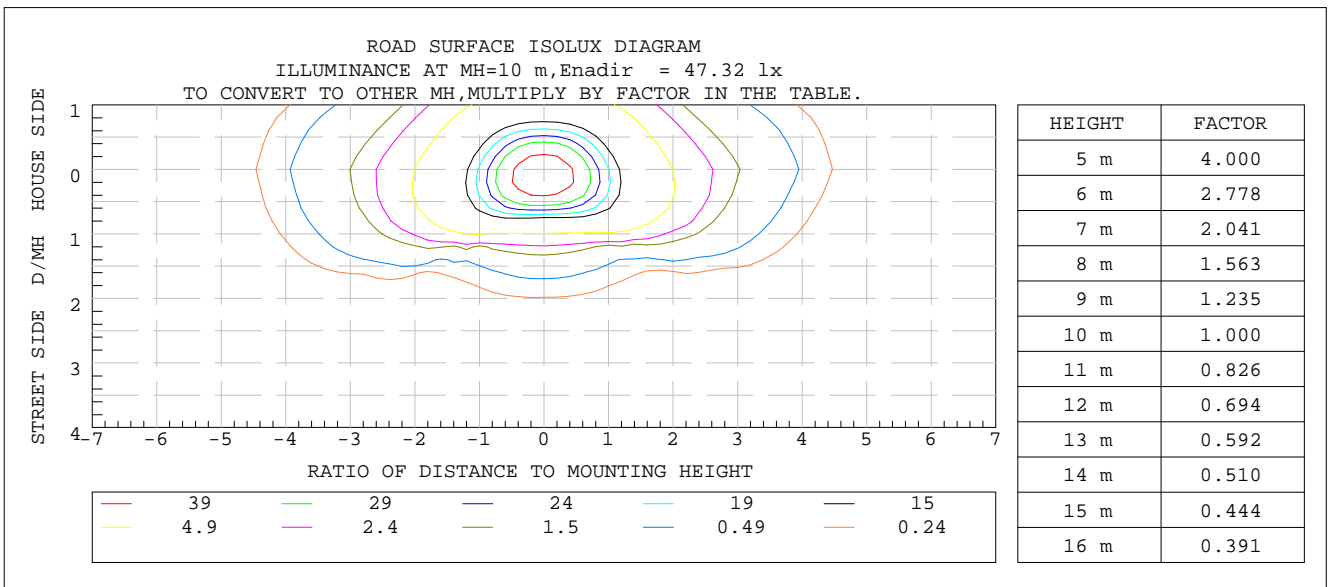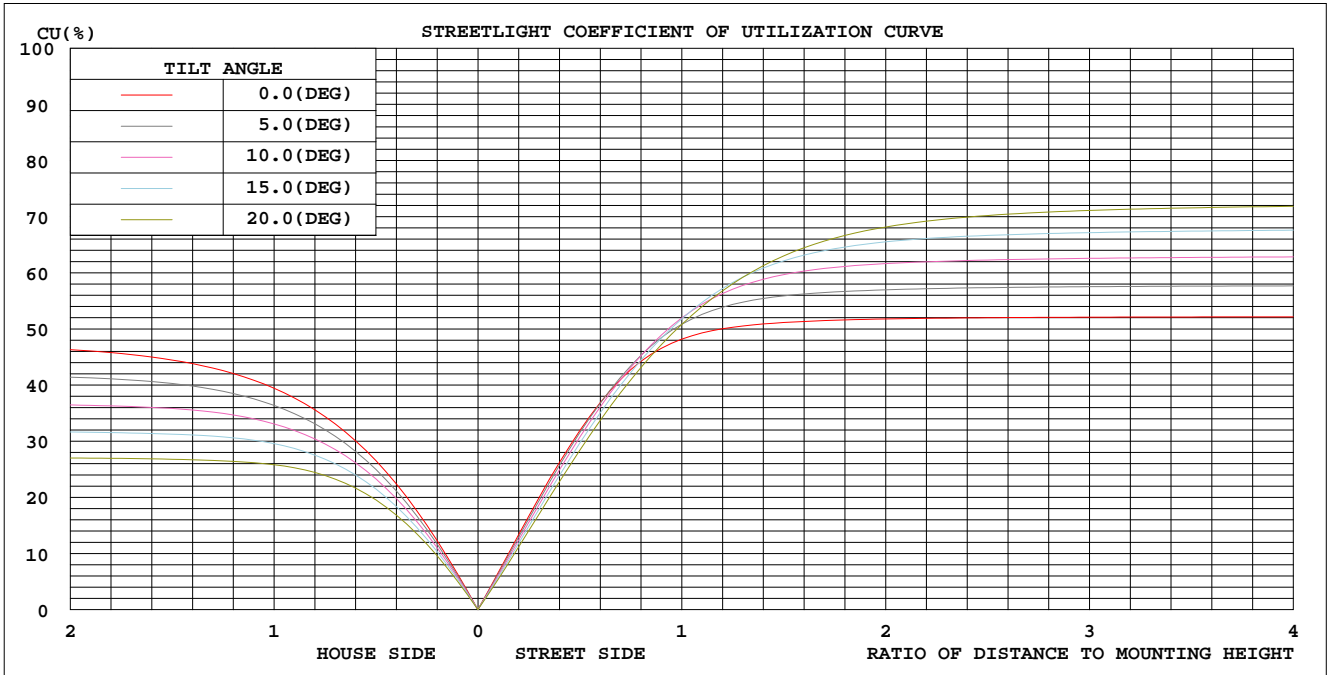

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 24.5DEG  
Operators: William  
Test Date: 2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
Humidity: 65.7%  
Test Distance: 26.000m [K=1.3825]  
Remarks:

ZONAL FLUX DIAGRAM

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	CUR.:	Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	4831	5074	5128	5057	4797	4507	4374	4530	0- 10	455.1	455.1	2.96,2.96
20	5104	5363	5040	5280	5007	4301	3890	4344	10- 20	1362	1817	11.8,11.8
30	5342	5454	4311	5291	5228	3991	3233	4056	20- 30	2185	4001	26,26
40	5504	5236	2019	4948	5359	3599	2588	3684	30- 40	2751	6752	43.9,43.9
50	5543	3761	861.3	3406	5420	3105	1905	3174	40- 50	2886	9638	62.7,62.7
60	5518	1227	344.2	928.2	5429	2251	1149	2324	50- 60	2685	12323	80.1,80.1
70	5038	242.1	123.9	222.3	5166	982.3	475.0	1004	60- 70	2066	14389	93.6,93.6
80	902.1	41.58	10.47	32.15	888.6	194.2	177.6	205.3	70- 80	919.6	15309	99.6,99.6
90	0	0	0	0	0	0	0	0	80- 90	68.37	15377	100,100
100	0	0	0	0	0	0	0	0	90-100	0	15377	100,100
110	0	0	0	0	0	0	0	0	100-110	0	15377	100,100
120	0	0	0	0	0	0	0	0	110-120	0	15377	100,100
130	0	0	0	0	0	0	0	0	120-130	0	15377	100,100
140	0	0	0	0	0	0	0	0	130-140	0	15377	100,100
150	0	0	0	0	0	0	0	0	140-150	0	15377	100,100
160	0	0	0	0	0	0	0	0	150-160	0	15377	100,100
170	0	0	0	0	0	0	0	0	160-170	0	15377	100,100
180	0	0	0	0	0	0	0	0	170-180	0	15377	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

ISOCANDELA DIAGRAM


Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

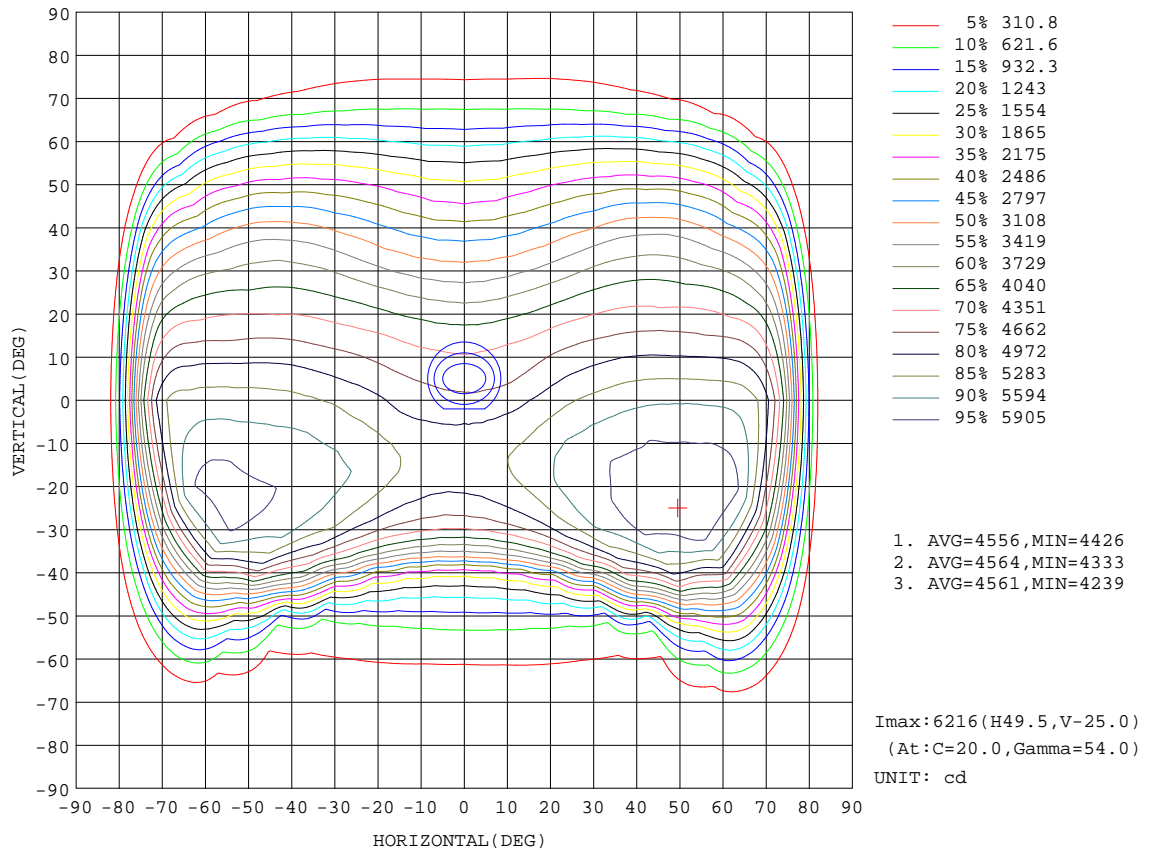

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

Planar Illuminance Curve

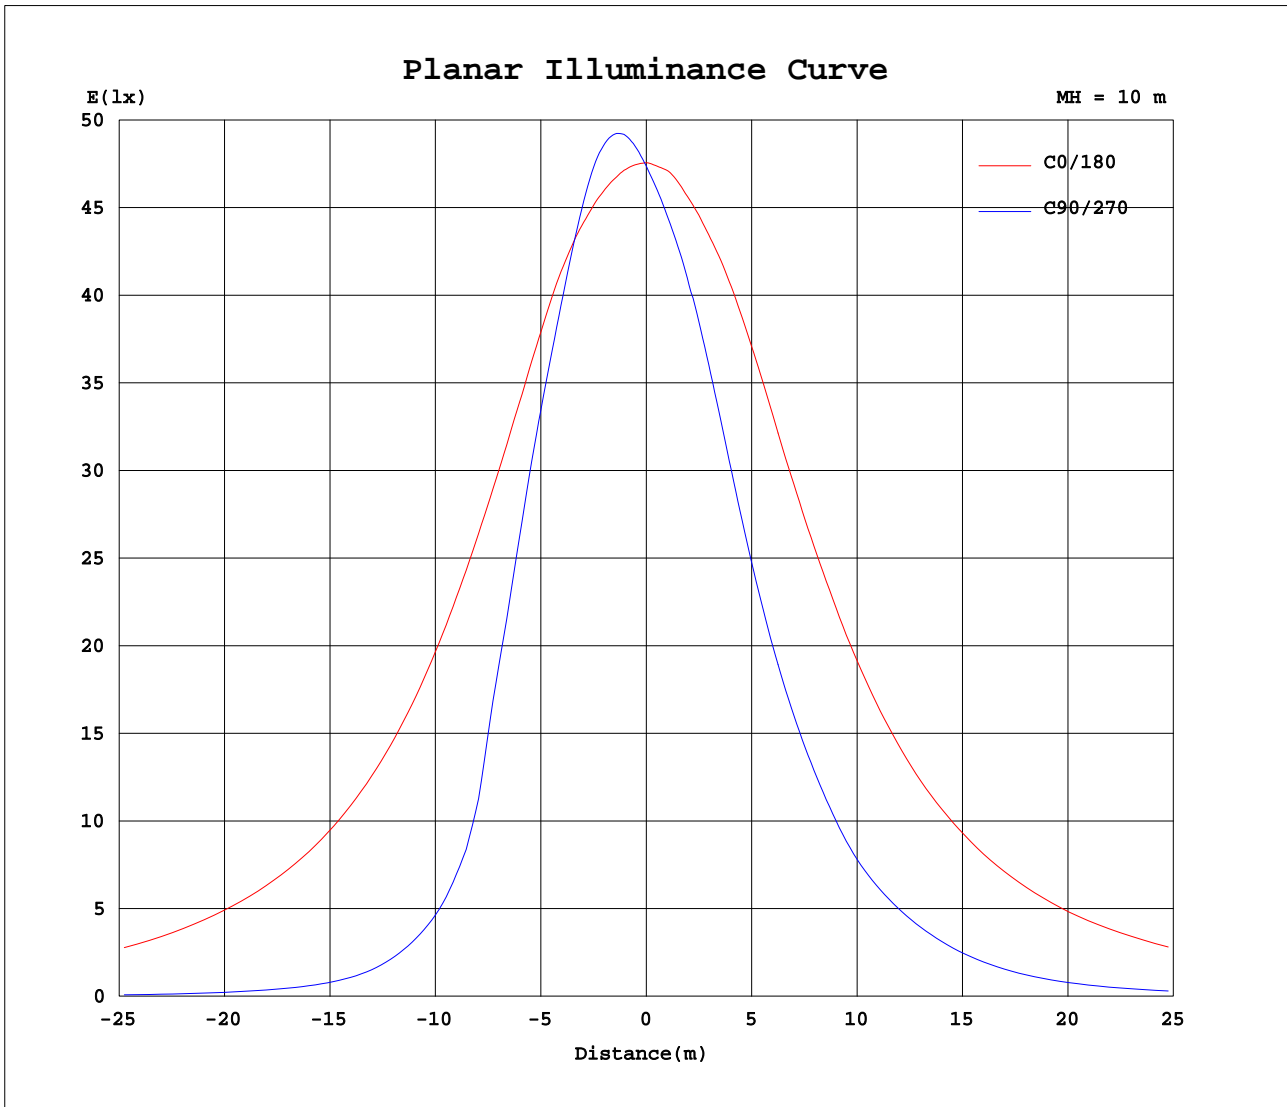


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 24.5DEG  
Operators: William  
Test Date: 2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
Humidity: 65.7%  
Test Distance: 26.000m [K=1.3825]  
Remarks:

LCS REPORT

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	LSUR.:	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

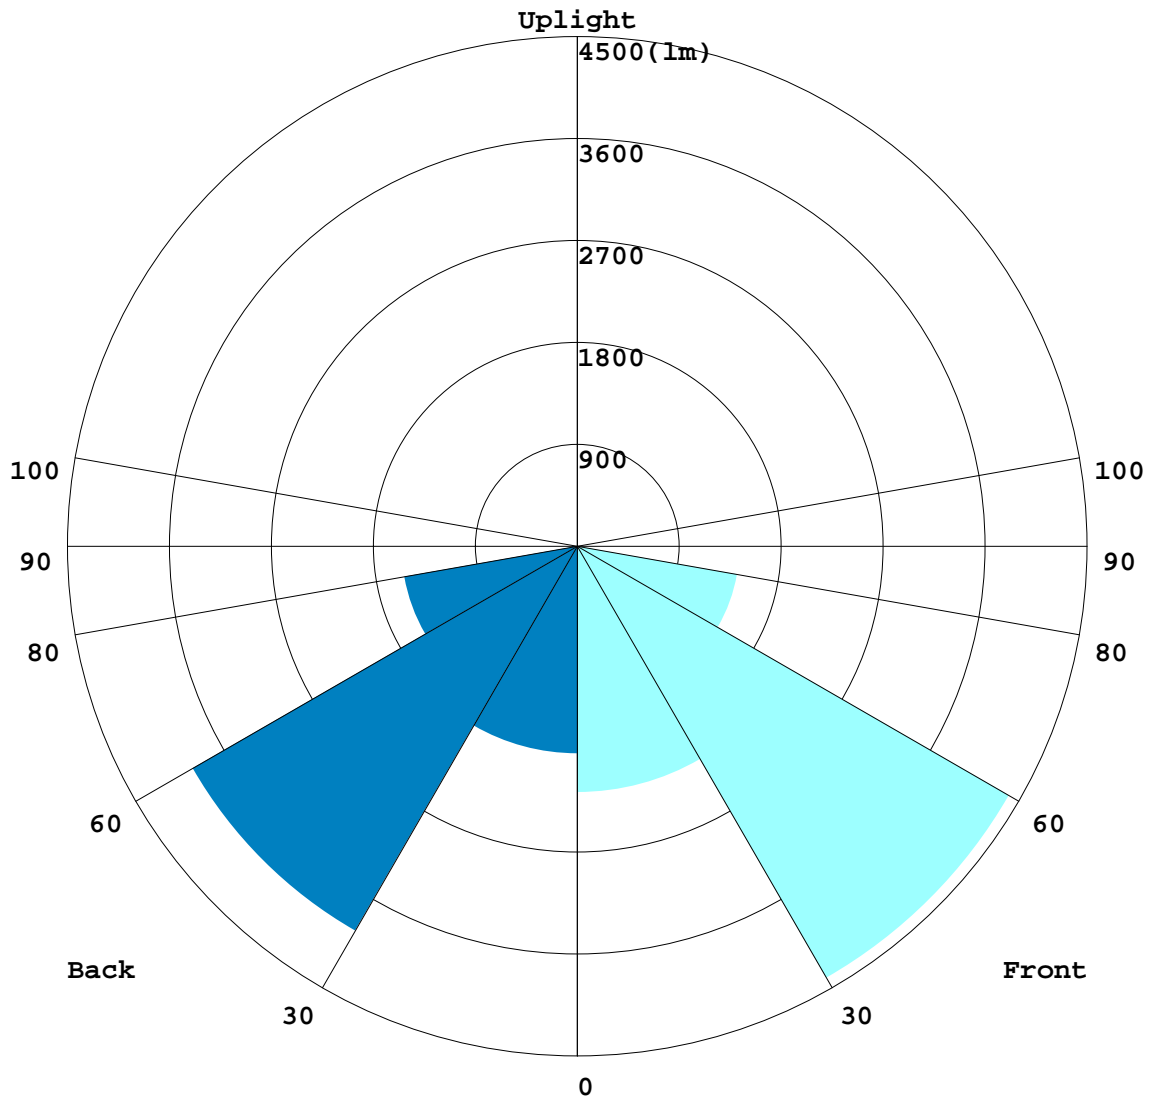

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

BUG REPORT

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	2172	14.1
FM - Front-Medium(30-60)	4401.1	28.6
FH - Front-High(60-80)	1434.7	9.3
FVH - Front-Very High(80-90)	20.679	0.1
Total Forward Light	8028.5	52.2

BL - Back-Low(0-30)	1829.4	11.9
BM - Back-Medium(30-60)	3920.8	25.5
BH - Back-High(60-80)	1550.5	10.1
BVH - Back-Very High(80-90)	47.696	0.3
Total Back Light	7348.4	47.8

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	7348.4	0	7348.4
Street Side	8028.5	0	8028.5

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04


γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:



ROAD ISOCANDELA REPORT

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd	SUR.:	Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

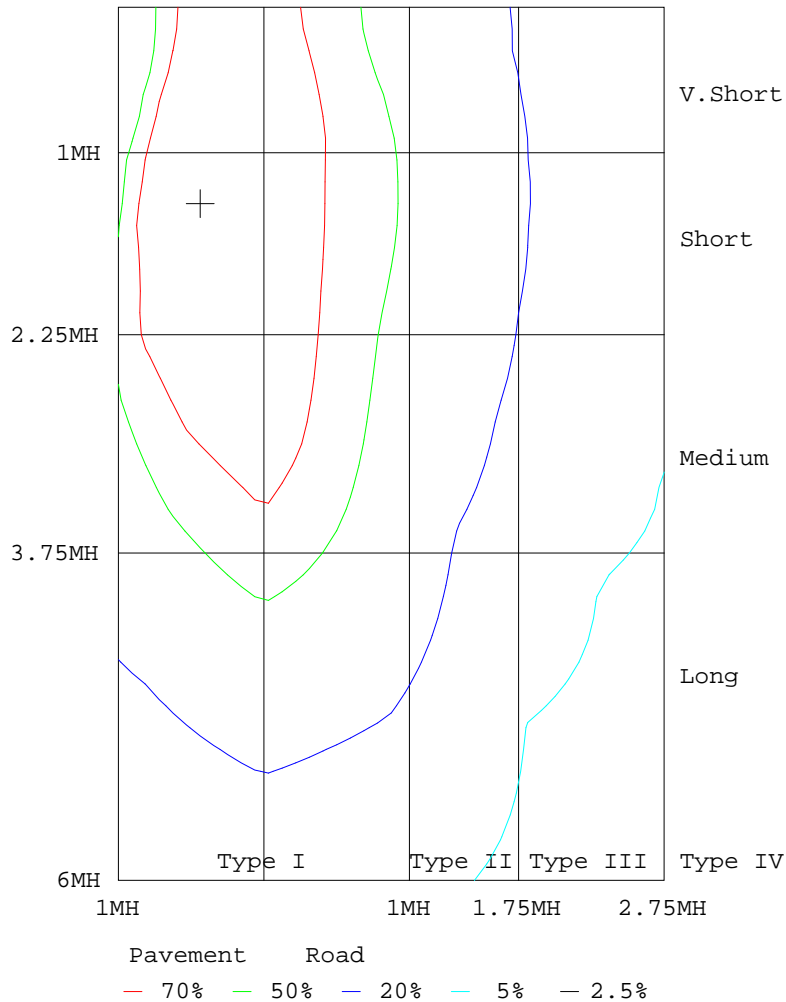

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738
5	4762	4794	4845	4864	4895	4897	4926	4945	4941	4958	4943	4933	4925	4905	4883	4869	4822	4798	4755
10	4831	4896	4965	5013	5059	5089	5113	5121	5123	5128	5126	5107	5100	5070	5045	4996	4935	4881	4797
15	4948	5043	5141	5192	5236	5240	5234	5205	5192	5175	5170	5187	5195	5203	5188	5146	5078	4984	4878
20	5104	5243	5358	5400	5398	5328	5244	5156	5077	5040	5040	5100	5184	5256	5304	5312	5252	5145	5007
25	5243	5419	5570	5598	5531	5351	5154	4990	4846	4780	4791	4898	5058	5228	5400	5479	5435	5307	5127
30	5342	5573	5741	5740	5607	5301	4978	4674	4418	4311	4369	4564	4840	5145	5437	5600	5579	5444	5228
35	5431	5710	5854	5835	5638	5195	4578	3985	3567	3418	3504	3866	4398	4964	5423	5672	5702	5568	5295
40	5504	5821	5956	5888	5621	4852	3789	2778	2179	2019	2129	2612	3589	4543	5354	5734	5802	5671	5359
45	5539	5904	6038	5959	5396	4149	2349	1671	1385	1312	1356	1590	2198	3802	5053	5779	5886	5741	5395
50	5543	5954	6143	5915	4863	2660	1430	1035	901	861	882	989	1328	2368	4445	5679	5982	5818	5420
55	5537	6025	6197	5580	3851	1297	739	590	543	528	529	564	682	1105	3353	5297	6047	5916	5436
60	5518	6092	6076	4871	1961	494	414	386	358	344	351	376	404	459	1398	4383	5915	6018	5429
65	5436	5925	5395	3241	563	320	282	256	232	219	227	249	273	309	464	2450	5087	5859	5394
70	5038	4951	3843	1542	283	201	171	148	132	124	128	142	161	189	256	1113	3331	4746	5166
75	3614	3074	1984	586	146	102	80.7	63.9	54.6	50.7	52.2	59.1	73.3	91.8	127	384	1542	2681	3706
80	902	740	492	147	50.9	32.2	21.7	14.1	11.3	10.5	10.6	12.2	17.5	25.5	38.8	87.8	346	575	889
85	46.3	41.7	30.7	16.1	6.91	1.68	0.81	0.58	0.44	0.43	0.44	0.37	0.51	0.80	1.59	8.12	17.4	27.3	40.7
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 24.5DEG  
 Operators: William  
 Test Date: 2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity: 65.7%  
 Test Distance: 26.000m [K=1.3825]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.97V I:0.4643A P:99.613W PF:0.9754 Freq:50.01Hz Lamp Flux:15376.9x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SR.:	Shielding Angle:N/A

Table--2

UNIT: cd

C(DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738	4738		
5	4716	4685	4644	4626	4590	4573	4561	4554	4545	4556	4566	4594	4604	4632	4664	4697	4733		
10	4725	4671	4600	4540	4475	4438	4404	4387	4374	4387	4420	4455	4502	4558	4624	4680	4756		
15	4772	4674	4558	4465	4368	4288	4228	4176	4168	4183	4242	4315	4403	4499	4602	4715	4831		
20	4851	4691	4525	4379	4223	4102	3983	3915	3890	3915	3998	4124	4266	4423	4606	4783	4957		
25	4904	4694	4474	4276	4053	3864	3708	3609	3563	3609	3723	3894	4095	4331	4580	4819	5051		
30	4930	4662	4384	4126	3857	3605	3400	3273	3233	3283	3430	3648	3906	4206	4504	4805	5097		
35	4949	4599	4270	3968	3632	3324	3094	2957	2915	2968	3117	3376	3702	4055	4392	4739	5119		
40	4944	4515	4145	3790	3407	3057	2806	2634	2588	2644	2821	3101	3479	3888	4262	4654	5092		
45	4888	4390	3993	3600	3161	2800	2503	2283	2210	2289	2517	2821	3225	3692	4105	4510	5023		
50	4785	4214	3802	3348	2861	2487	2173	1970	1905	1972	2184	2503	2908	3440	3904	4323	4904		
55	4642	3999	3529	2991	2488	2115	1813	1614	1557	1625	1837	2148	2526	3088	3627	4109	4758		
60	4468	3701	3121	2482	2021	1663	1386	1201	1149	1214	1412	1712	2077	2571	3228	3798	4561		
65	4207	3215	2481	1879	1463	1144	926	808	776	811	937	1171	1513	1957	2597	3317	4262		
70	3693	2420	1694	1169	795	609	530	489	475	489	530	613	808	1200	1803	2528	3723		
75	2630	1304	715	414	336	330	320	300	291	301	326	338	346	421	773	1395	2663		
80	603	214	191	196	193	195	183	180	178	182	186	202	203	207	205	231	624		
85	46.3	50.8	58.0	70.2	76.5	76.7	74.3	77.2	78.1	79.3	78.1	80.9	84.7	81.7	70.8	65.9	61.0		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks: