
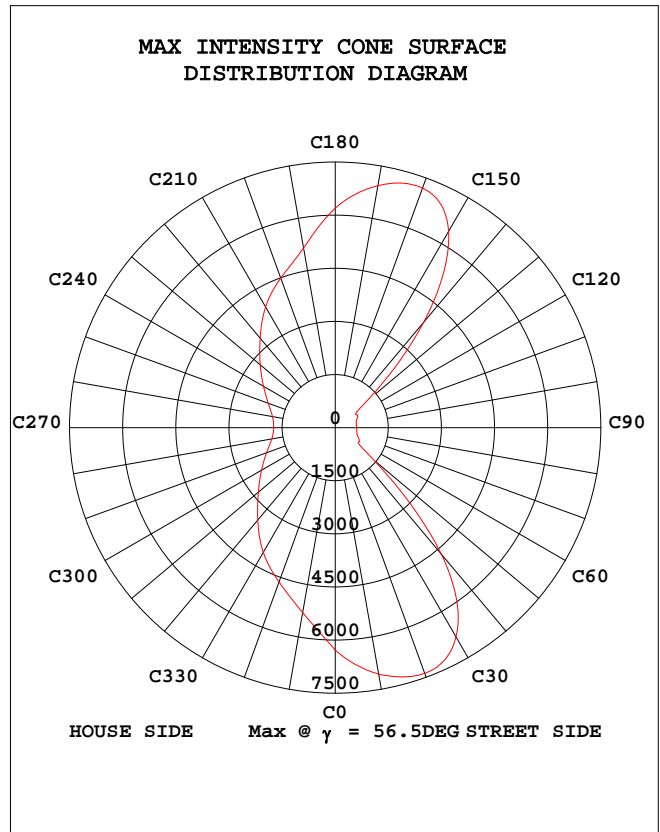


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 153.95 lm/W			
MODEL	ST-52-120W	I _{max} (cd)	7383	η street_up(%)	0.0
NOMINAL POWER(W)	120	LOR(%)	100.0	η street_down(%)	53.2
RATED VOLTAGE(V)	100-240	TOTAL FLUX(lm)	18285	η house_up(%)	0.0
NOMINAL FLUX(lm)	18285.3	MAXIMUM @(C,γ)	20,56.5	η house_down(%)	46.8
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	220	η down(%)	100.0	SLI	21.531

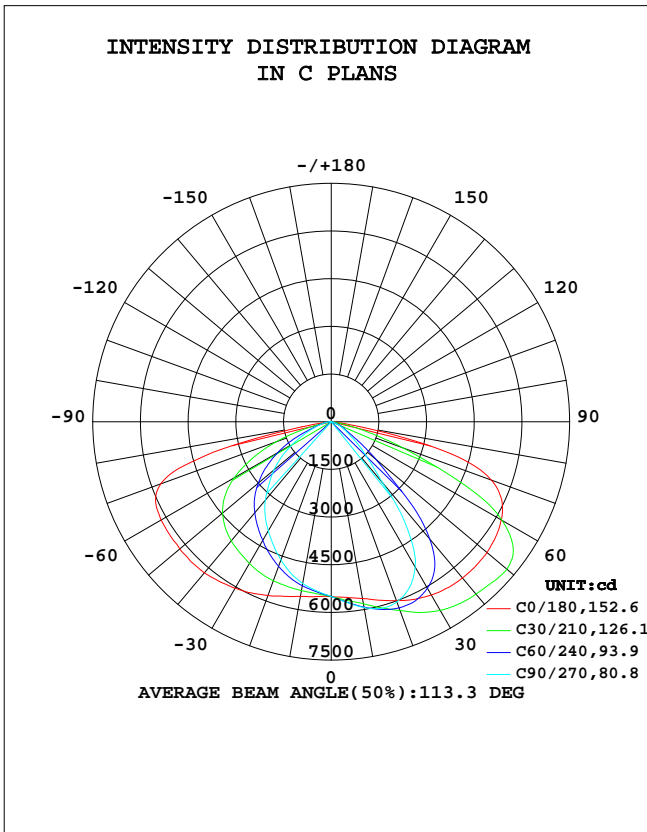


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks:

STREETLIGHT ISOCANDELA DIAGRAM

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SR.:	Shielding Angle:N/A

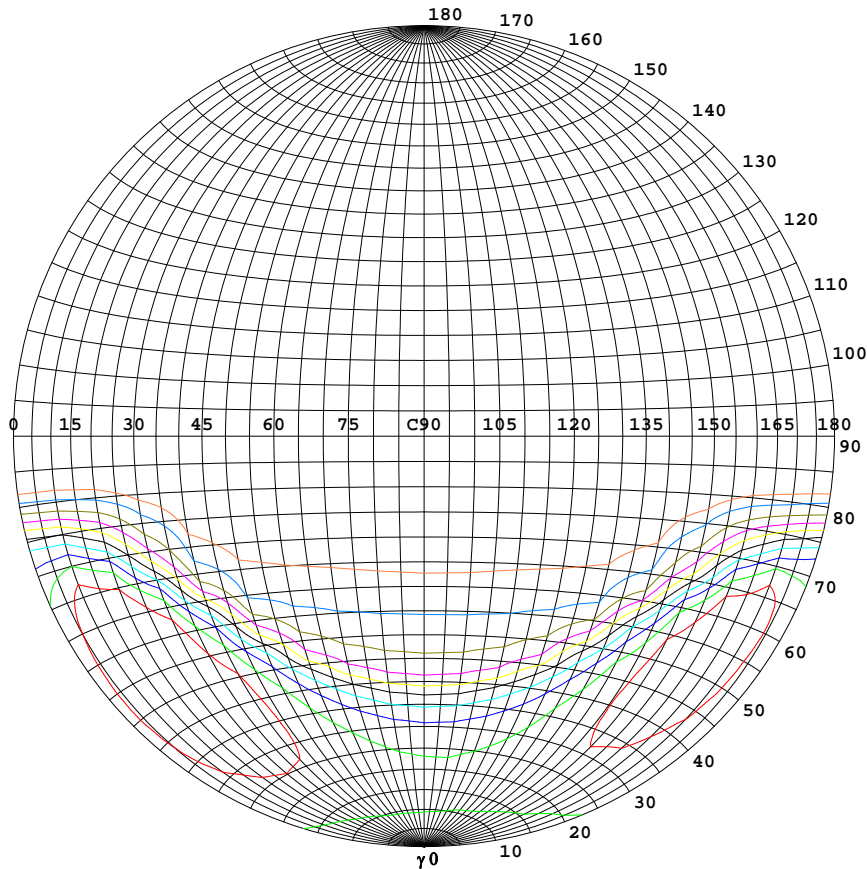

Classification:


IES:Type VS - Short
 CIE:Narrow - Short
 IES:Full cut-off
 CIE:Semi-cut-off
 Max.At80:52.07cd/klm
 Max.At90:0cd/klm
 Max.80-90:52.07cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	7383
90%	6645
80%	5906
70%	5168
60%	4430
50%	3691
40%	2953
30%	2215
20%	1477
10%	738
5%	369

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

gamma Range: 0 - 180DEG
 gamma Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks:

COEFFICIENT OF UTILIZATION CURVE
AND ISOLUX DIAGRAM

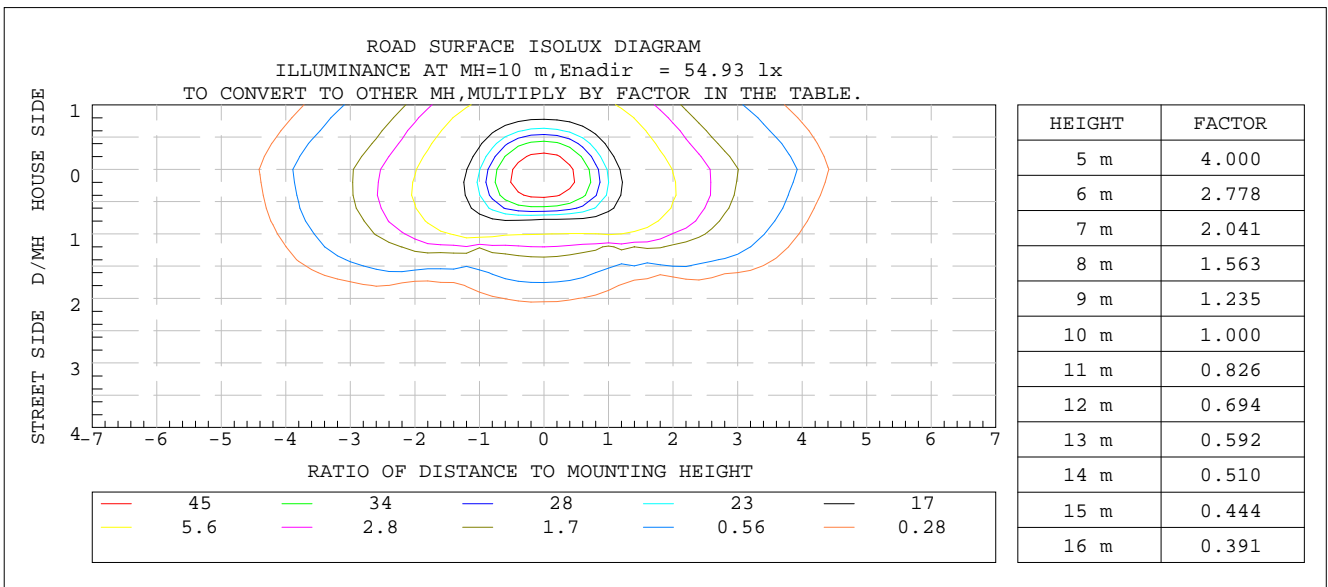

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity: 65.7%
Test Distance: 26.000m [K=1.3825]
Remarks:

ZONAL FLUX DIAGRAM

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	CUR.:	Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	5647	5877	5934	5849	5579	5306	5166	5351	0- 10	530.0	530.0	2.9,2.9
20	5991	6316	6033	6197	5818	5062	4628	5153	10- 20	1597	2127	11.6,11.6
30	6297	6572	5283	6345	6047	4716	3962	4847	20- 30	2592	4719	25.8,25.8
40	6417	6423	2540	6050	6204	4299	3230	4431	30- 40	3306	8025	43.9,43.9
50	6400	4994	1088	4437	6221	3686	2348	3790	40- 50	3478	11503	62.9,62.9
60	6176	1899	458.8	1419	6179	2596	1393	2681	50- 60	3212	14715	80.5,80.5
70	5356	387.6	171.8	329.0	5705	1091	590.9	1107	60- 70	2432	17147	93.8,93.8
80	952.2	56.14	11.74	39.88	951.6	228.7	224.0	249.8	70- 80	1058	18205	99.6,99.6
90	0	0	0	0	0	0	0	0	80- 90	80.07	18285	100,100
100	0	0	0	0	0	0	0	0	90-100	0	18285	100,100
110	0	0	0	0	0	0	0	0	100-110	0	18285	100,100
120	0	0	0	0	0	0	0	0	110-120	0	18285	100,100
130	0	0	0	0	0	0	0	0	120-130	0	18285	100,100
140	0	0	0	0	0	0	0	0	130-140	0	18285	100,100
150	0	0	0	0	0	0	0	0	140-150	0	18285	100,100
160	0	0	0	0	0	0	0	0	150-160	0	18285	100,100
170	0	0	0	0	0	0	0	0	160-170	0	18285	100,100
180	0	0	0	0	0	0	0	0	170-180	0	18285	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks:

ISOCANDELA DIAGRAM


Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

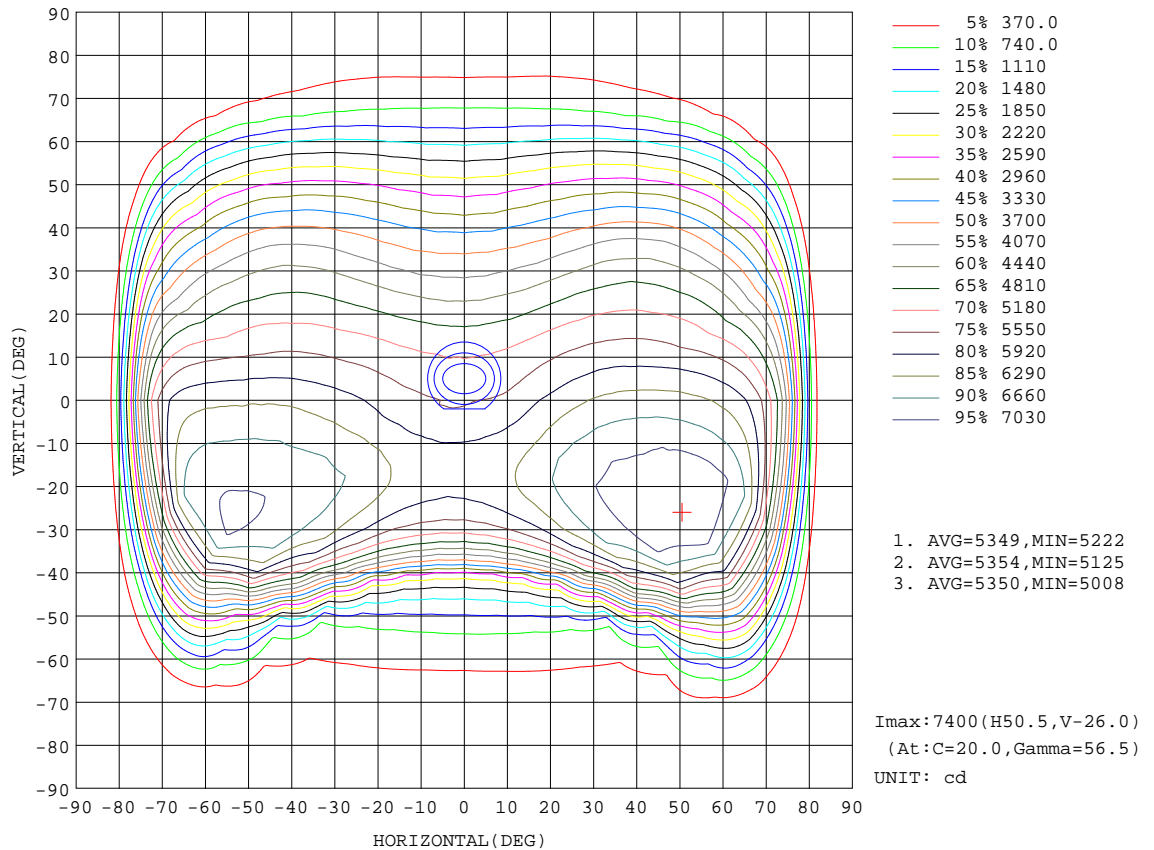

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 24.5DEG
 Operators: William
 Test Date: 2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity: 65.7%
 Test Distance: 26.000m [K=1.3825]
 Remarks:

Planar Illuminance Curve

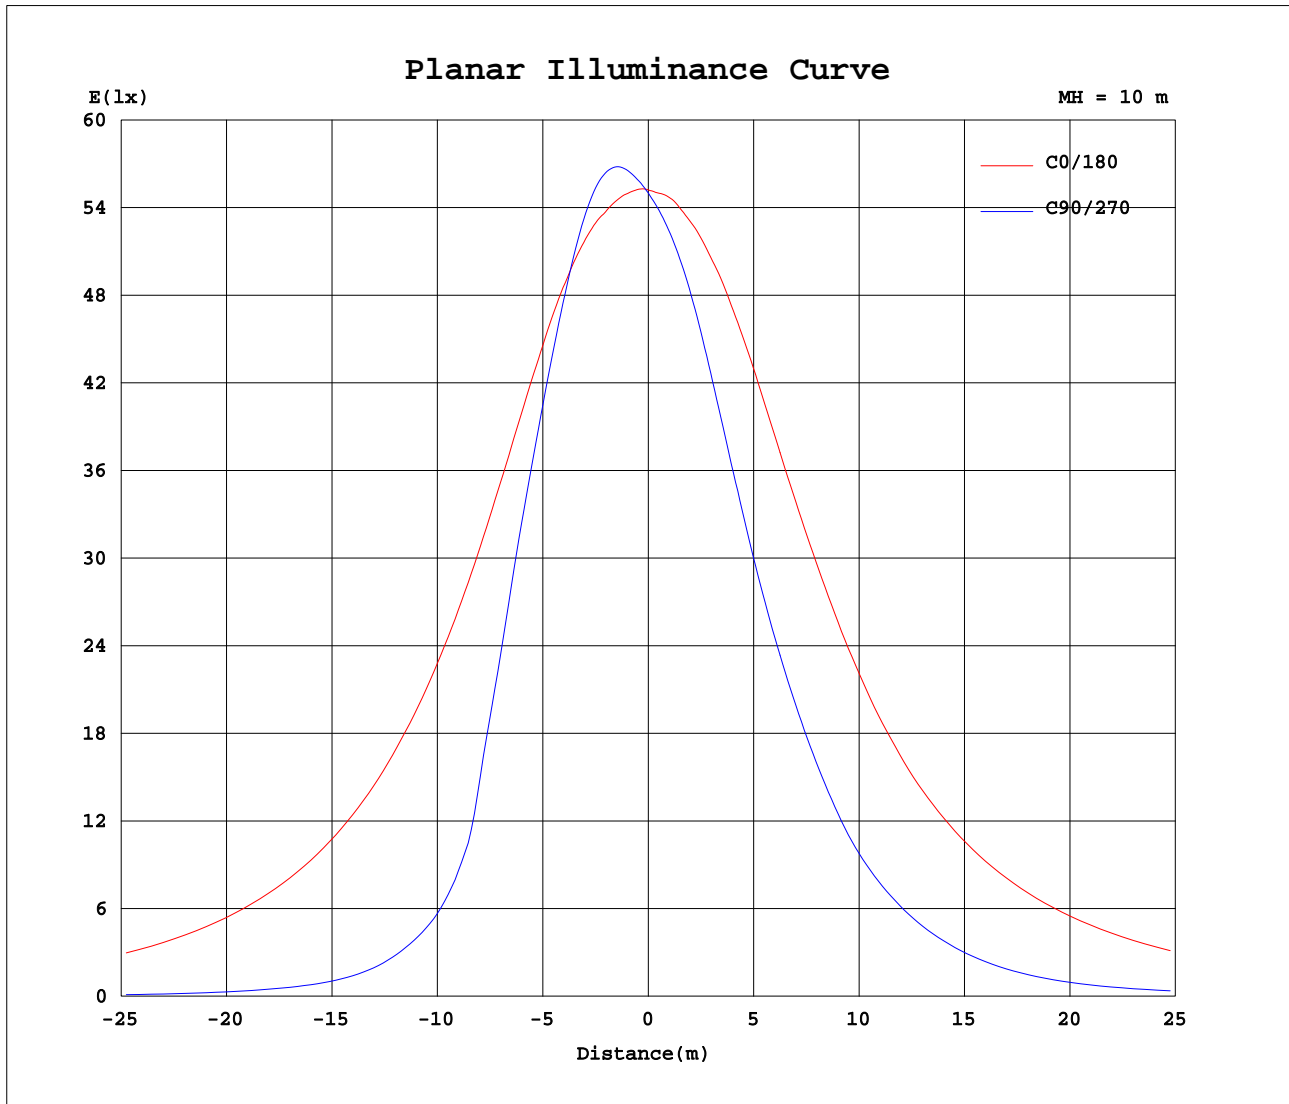


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 24.5DEG
Operators: William
Test Date: 2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.366
Humidity: 65.7%
Test Distance: 26.000m [K=1.3825]
Remarks:

LCS REPORT

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	LSUR.:	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

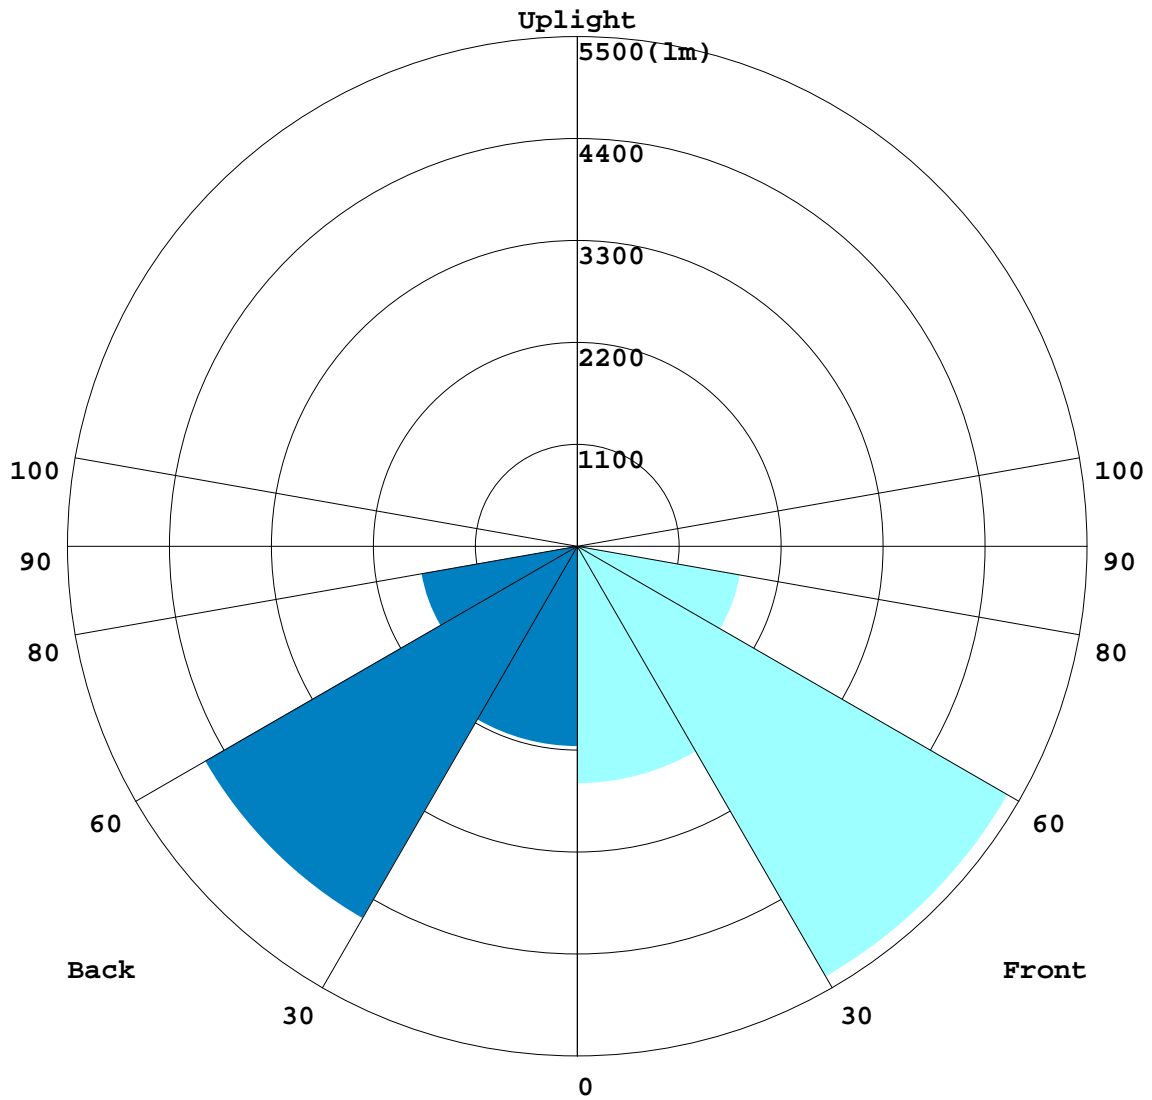

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks:

BUG REPORT

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	2559.8	14.0
FM - Front-Medium(30-60)	5361.4	29.3
FH - Front-High(60-80)	1783.6	9.8
FVH - Front-Very High(80-90)	25.093	0.1
Total Forward Light	9729.9	53.2

BL - Back-Low(0-30)	2159.3	11.8
BM - Back-Medium(30-60)	4634.5	25.3
BH - Back-High(60-80)	1706.5	9.3
BVH - Back-Very High(80-90)	54.98	0.3
Total Back Light	8555.3	46.8

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B3-U0-G1
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	8555.3	0	8555.3
Street Side	9729.9	0	9729.9


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks:

ROAD ISOCANDELA REPORT

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

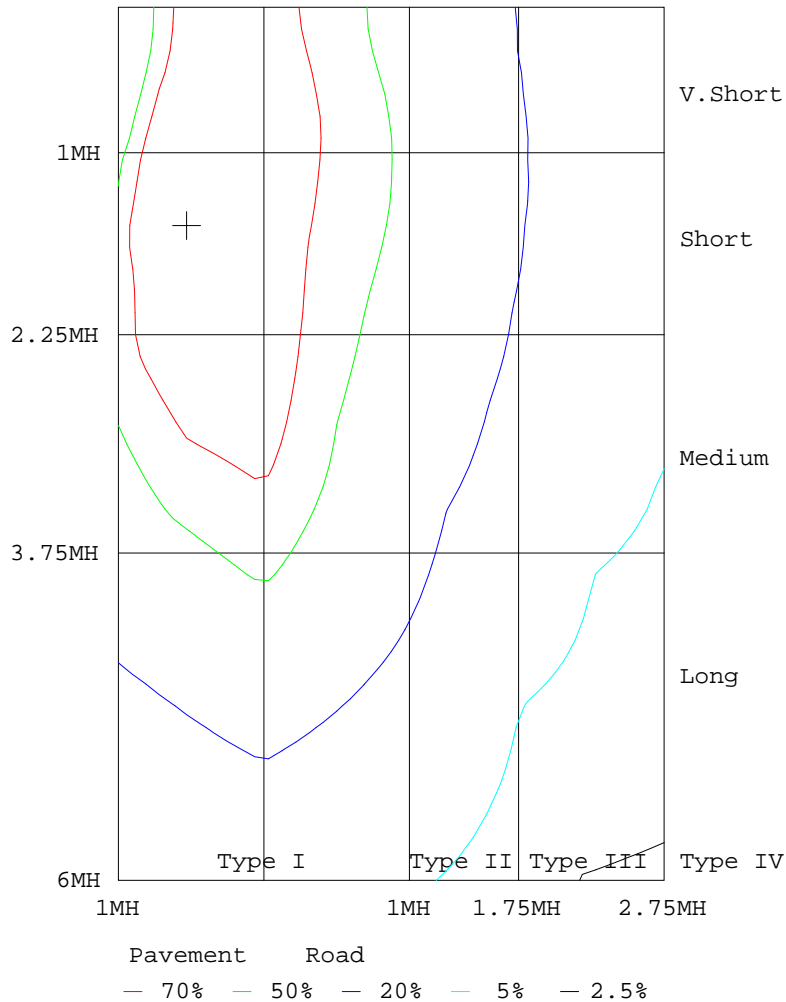

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501
5	5547	5584	5606	5643	5658	5680	5698	5698	5713	5709	5711	5699	5682	5669	5641	5610	5591	5560	5523
10	5647	5703	5759	5815	5856	5897	5922	5926	5935	5934	5925	5912	5879	5873	5825	5780	5720	5660	5579
15	5811	5901	5983	6055	6078	6105	6112	6097	6077	6077	6069	6062	6054	6047	6019	5958	5903	5786	5687
20	5991	6146	6263	6319	6337	6295	6232	6136	6065	6033	6023	6076	6125	6180	6215	6182	6108	5971	5818
25	6165	6373	6543	6621	6564	6418	6227	6010	5861	5782	5789	5905	6059	6248	6387	6419	6328	6153	5942
30	6297	6565	6779	6853	6724	6419	6047	5694	5412	5283	5332	5541	5835	6188	6502	6614	6536	6324	6047
35	6380	6730	6955	6996	6793	6325	5668	4995	4466	4255	4379	4821	5385	6020	6511	6747	6707	6470	6133
40	6417	6851	7090	7081	6811	6035	4823	3706	2865	2540	2740	3479	4483	5631	6469	6828	6847	6599	6204
45	6424	6963	7196	7153	6673	5303	3274	2098	1711	1604	1661	1950	2878	4786	6249	6893	6966	6711	6229
50	6400	7010	7300	7214	6133	3854	1829	1305	1139	1088	1113	1242	1658	3280	5594	6886	7054	6819	6221
55	6317	7061	7383	6991	5115	1904	973	772	708	687	689	732	889	1548	4423	6581	7181	6901	6202
60	6176	7046	7292	6200	3121	678	545	510	476	459	464	492	523	607	2232	5692	7105	7011	6179
65	5925	6876	6553	4455	1151	427	374	344	314	298	306	331	356	402	845	3461	6282	6922	6088
70	5356	5876	4905	2380	505	270	229	201	182	172	177	193	213	247	411	1753	4331	5772	5705
75	3900	3636	2632	1023	235	135	109	88.6	74.5	69.1	71.3	81.3	97.3	118	180	689	2070	3222	4059
80	952	845	639	265	70.9	41.3	27.3	18.0	13.6	11.7	12.2	14.6	21.0	30.4	49.4	150	428	620	952
85	55.6	53.3	42.8	22.4	9.37	2.46	1.31	0.80	0.73	0.73	0.73	0.73	0.80	1.18	2.45	10.8	21.0	33.5	49.2
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.92V I:0.5614A P:118.77W PF:0.9620 Freq:50.01Hz Lamp Flux:18285.3x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SIZE:	Shielding Angle:N/A

Table--2

UNIT: cd

C(DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501	5501		
5	5488	5462	5431	5407	5382	5370	5346	5343	5337	5347	5364	5372	5401	5425	5447	5485	5516		
10	5520	5458	5395	5331	5281	5240	5184	5184	5166	5183	5222	5256	5324	5377	5440	5518	5578		
15	5565	5459	5362	5250	5150	5069	4987	4947	4927	4955	5018	5102	5204	5328	5451	5576	5687		
20	5650	5478	5322	5145	4980	4844	4718	4642	4628	4662	4762	4884	5055	5252	5447	5648	5819		
25	5709	5476	5255	5020	4788	4590	4427	4321	4297	4343	4482	4642	4882	5146	5406	5680	5930		
30	5736	5425	5148	4861	4570	4310	4104	3994	3962	4015	4178	4393	4686	5008	5332	5655	5981		
35	5734	5363	5022	4687	4348	4033	3790	3656	3623	3683	3857	4110	4464	4853	5218	5588	5985		
40	5693	5255	4894	4498	4100	3743	3461	3284	3230	3300	3509	3802	4210	4652	5060	5471	5912		
45	5593	5108	4713	4279	3811	3414	3073	2843	2766	2855	3116	3458	3900	4419	4875	5300	5793		
50	5442	4901	4464	3943	3428	2991	2640	2416	2348	2432	2678	3033	3502	4077	4603	5067	5626		
55	5232	4608	4084	3475	2938	2505	2169	1951	1889	1970	2215	2561	2999	3585	4210	4754	5394		
60	4949	4181	3525	2847	2344	1945	1641	1450	1393	1466	1681	2005	2417	2946	3639	4296	5047		
65	4529	3517	2747	2135	1672	1328	1092	978	943	983	1107	1353	1712	2198	2852	3611	4543		
70	3775	2560	1846	1292	890	715	642	605	591	605	647	727	901	1313	1919	2638	3708		
75	2491	1327	774	474	407	407	398	374	364	375	407	420	425	492	808	1393	2425		
80	548	240	216	228	230	237	224	224	224	228	233	250	250	250	245	261	554		
85	53.8	57.9	63.4	75.9	86.1	89.7	88.2	94.0	97.1	98.8	95.2	98.6	100	91.7	79.6	75.4	71.5		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:24.5DEG
 Operators:William
 Test Date:2019-01-04

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.366
 Humidity:65.7%
 Test Distance:26.000m [K=1.3825]
 Remarks: