
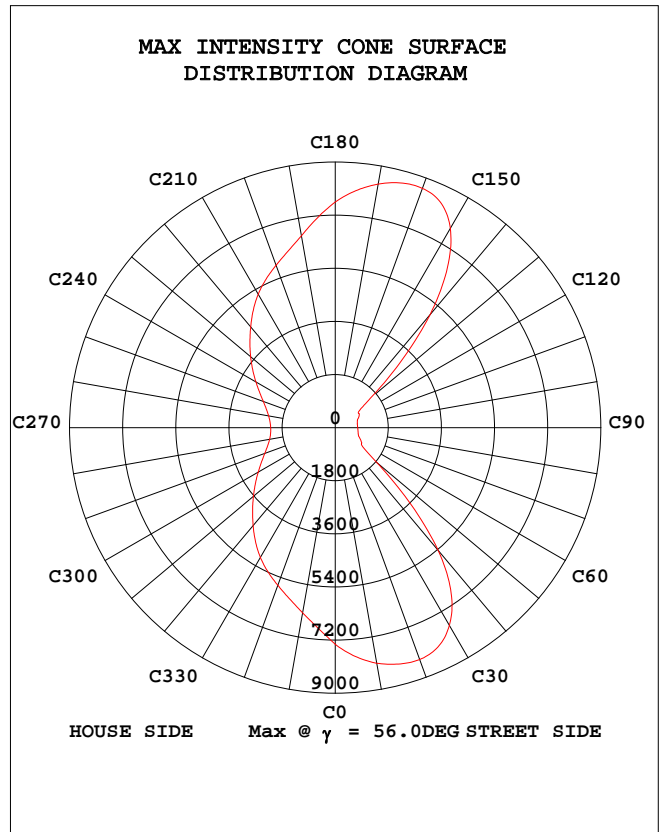


**STREETLIGHT PHOTOMETRIC TEST REPORT**

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

DATA OF LAMP		PHOTOMETRIC DATA Eff: 150.06 lm/W			
MODEL	ST-52-150W	I <sub>max</sub> (cd)	8631	η street_up(%)	0.0
NOMINAL POWER(W)	150	LOR(%)	100.0	η street_down(%)	51.8
RATED VOLTAGE(V)	100-240	TOTAL FLUX(lm)	22197	η house_up(%)	0.0
NOMINAL FLUX(lm)	22196.7	MAXIMUM @(C,γ )	160,56.0	η house_down(%)	48.2
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	220	η down(%)	100.0	SLI	22.034

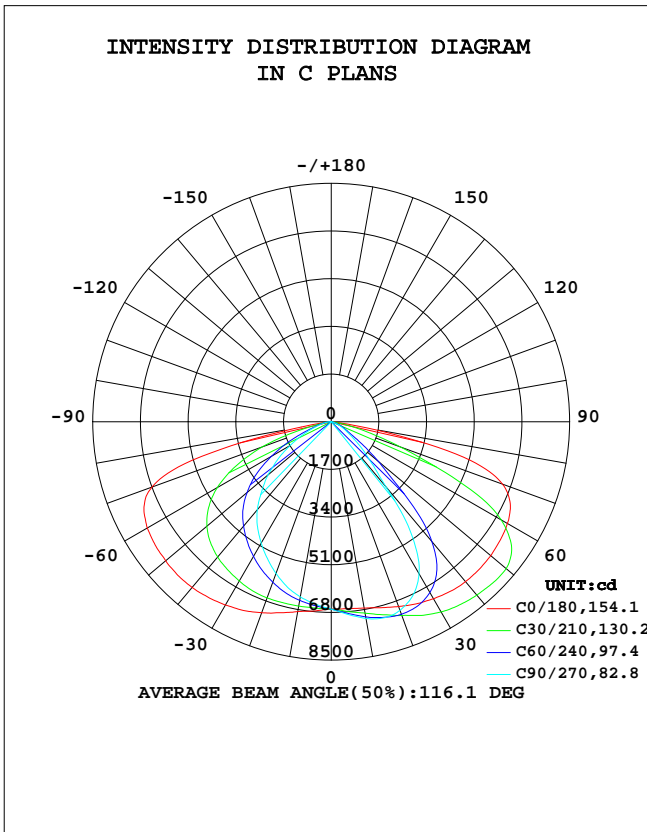


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

**STREETLIGHT ISOCANDELA DIAGRAM**

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	CSR.:	Shielding Angle:N/A

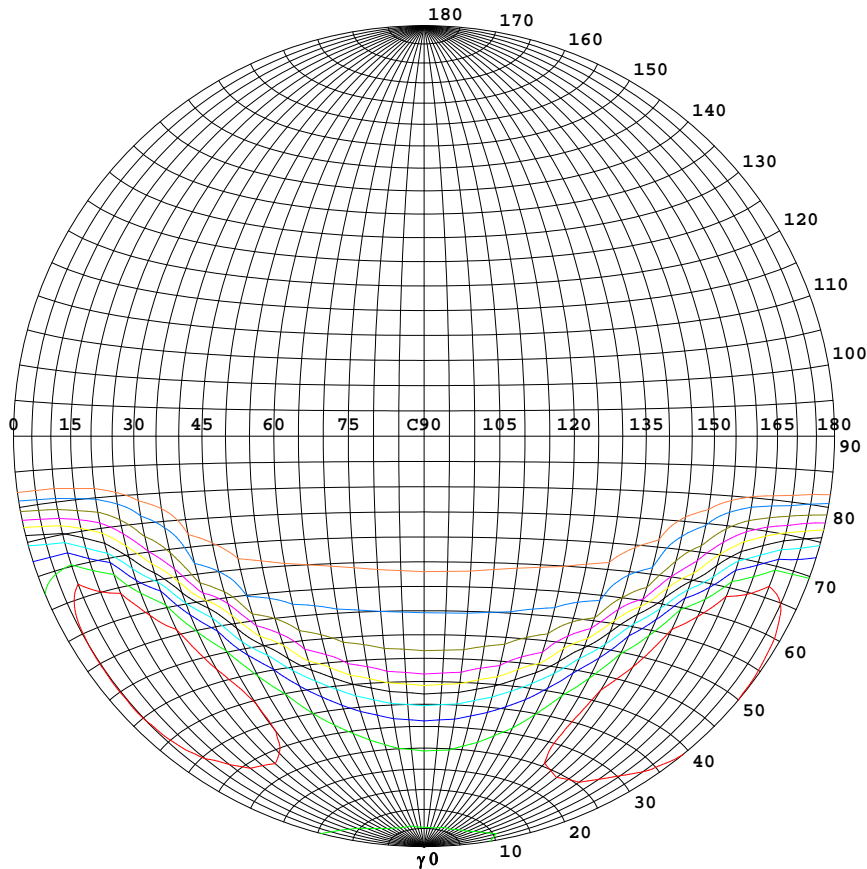

**Classification:**



IES:Type VS - Short  
 CIE:Narrow - Short  
 IES:Full cut-off  
 CIE:Semi-cut-off  
 Max.At80:60.46cd/klm  
 Max.At90:0cd/klm  
 Max.80-90:60.46cd/klm

ISOCANDELA DIAGRAM	
UNIT	cd
Imax=100%	8631
90%	7768
80%	6905
70%	6042
60%	5179
50%	4316
40%	3452
30%	2589
20%	1726
10%	863
5%	432

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

gamma Range: 0 - 180DEG  
 gamma Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

COEFFICIENT OF UTILIZATION CURVE  
AND ISOLUX DIAGRAM

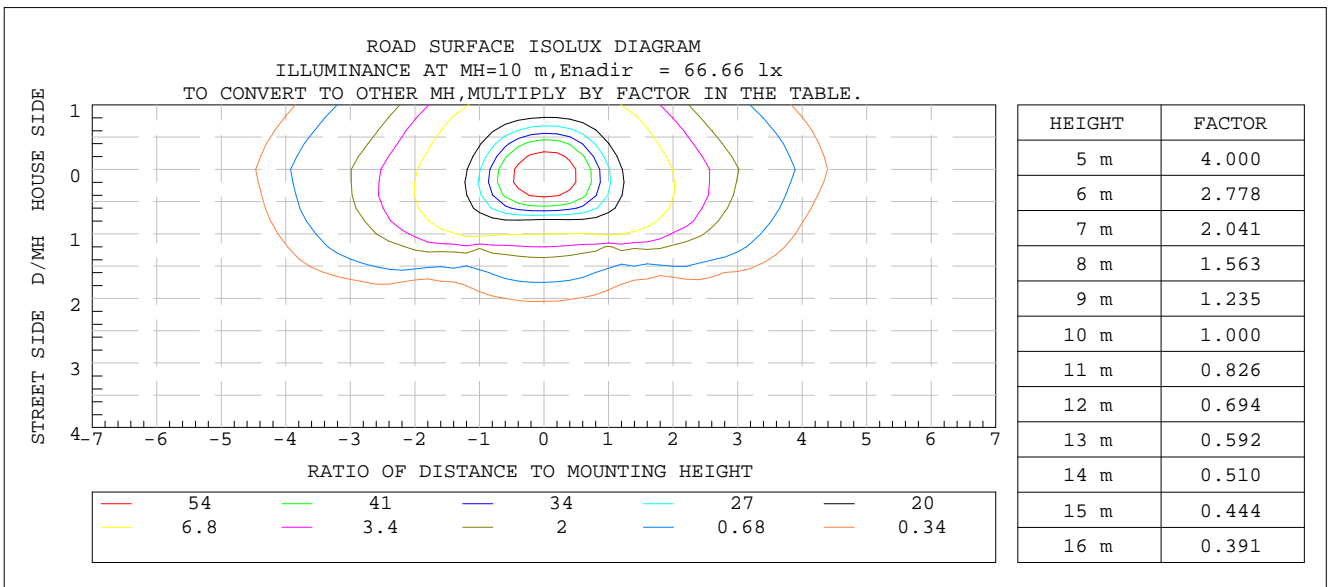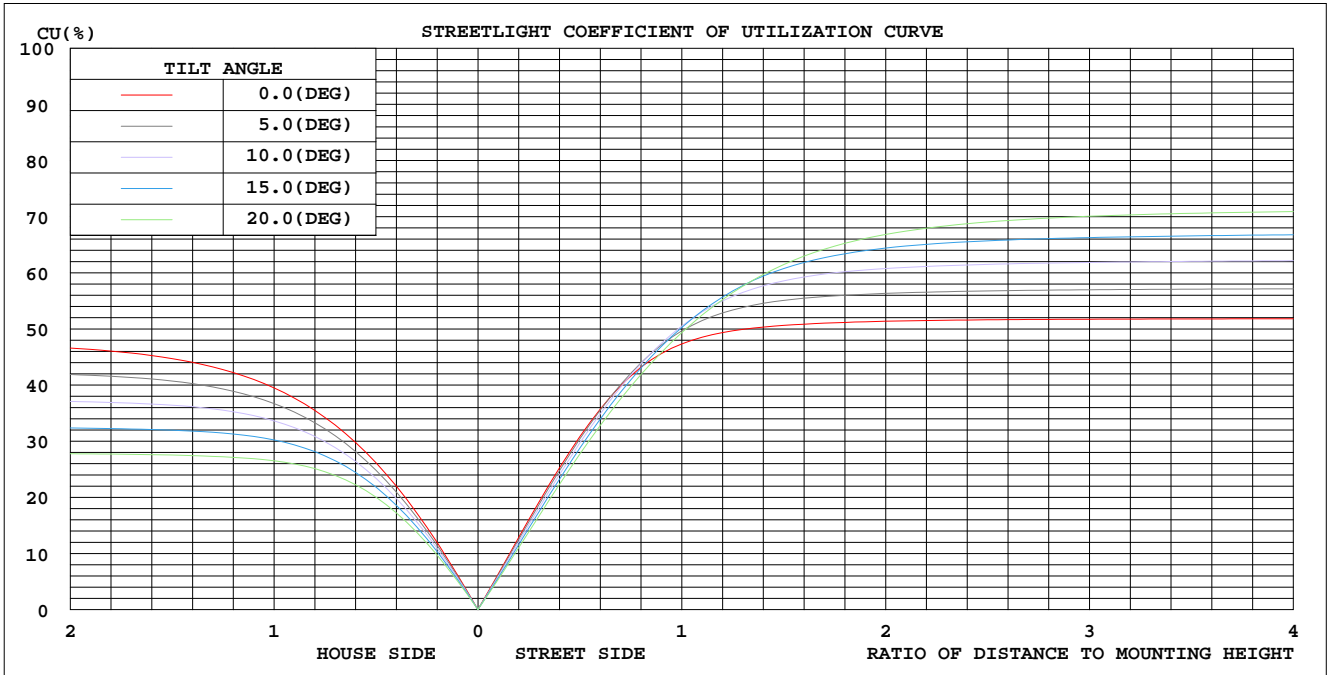

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 24.5DEG  
Operators: William  
Test Date: 2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
Humidity: 65.7%  
Test Distance: 26.000m [K=1.3825]  
Remarks:

ZONAL FLUX DIAGRAM

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
10	6747	7002	7121	7091	6874	6565	6342	6460	0- 10	643.2	643.2	2.9,2.9
20	7011	7361	7156	7504	7243	6373	5758	6192	10- 20	1931	2575	11.6,11.6
30	7286	7539	6261	7710	7545	6056	4998	5831	20- 30	3129	5704	25.7,25.7
40	7442	7303	3058	7371	7714	5592	4105	5361	30- 40	3996	9700	43.7,43.7
50	7425	5632	1327	5482	7706	4839	2935	4648	40- 50	4219	13919	62.7,62.7
60	7252	2155	554.0	1753	7575	3474	1699	3407	50- 60	3899	17818	80.3,80.3
70	6494	448.8	205.2	407.5	6799	1408	721.5	1447	60- 70	2963	20781	93.6,93.6
80	1342	68.71	17.01	50.03	1091	288.2	267.7	306.1	70- 80	1312	22093	99.5,99.5
90	0	0	0	0	0	0	0	0	80- 90	103.6	22197	100,100
100	0	0	0	0	0	0	0	0	90-100	0	22197	100,100
110	0	0	0	0	0	0	0	0	100-110	0	22197	100,100
120	0	0	0	0	0	0	0	0	110-120	0	22197	100,100
130	0	0	0	0	0	0	0	0	120-130	0	22197	100,100
140	0	0	0	0	0	0	0	0	130-140	0	22197	100,100
150	0	0	0	0	0	0	0	0	140-150	0	22197	100,100
160	0	0	0	0	0	0	0	0	150-160	0	22197	100,100
170	0	0	0	0	0	0	0	0	160-170	0	22197	100,100
180	0	0	0	0	0	0	0	0	170-180	0	22197	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

ISOCANDELA DIAGRAM


Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

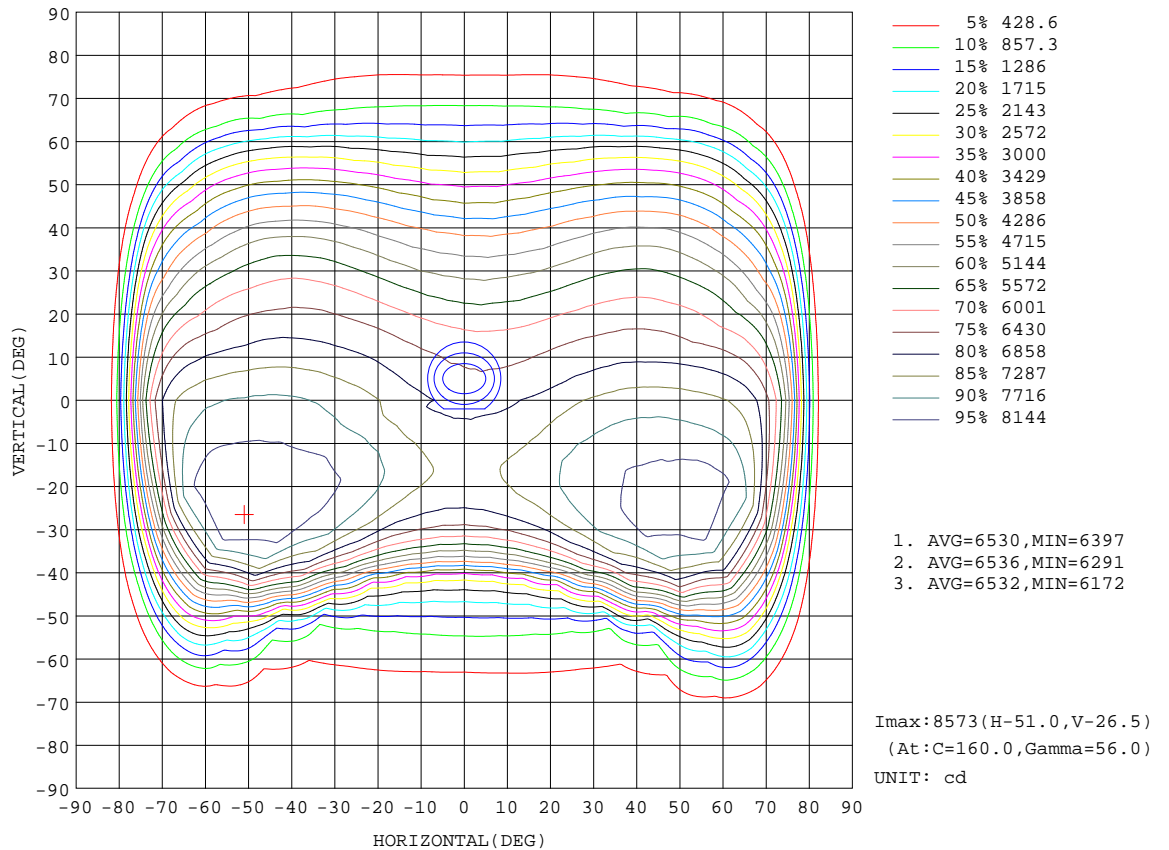

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

Planar Illuminance Curve

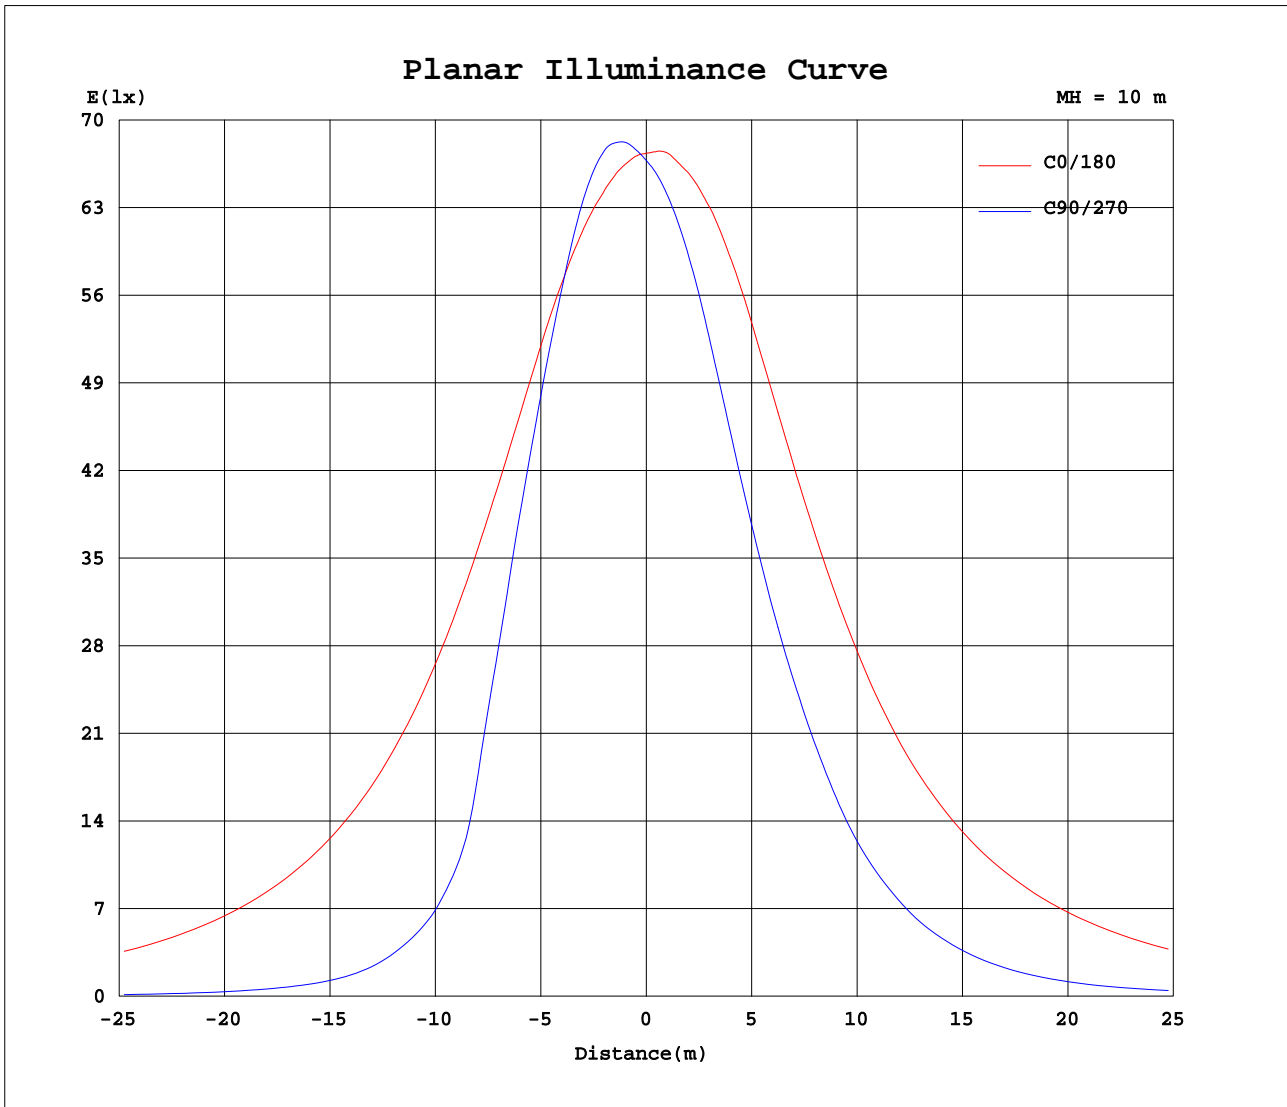


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 24.5DEG  
Operators: William  
Test Date: 2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
Humidity: 65.7%  
Test Distance: 26.000m [K=1.3825]  
Remarks:

LCS REPORT

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	LSUR.:	Shielding Angle:N/A

LUMINAIRE CLASSIFICATION SYSTEM(LCS) GRAPH

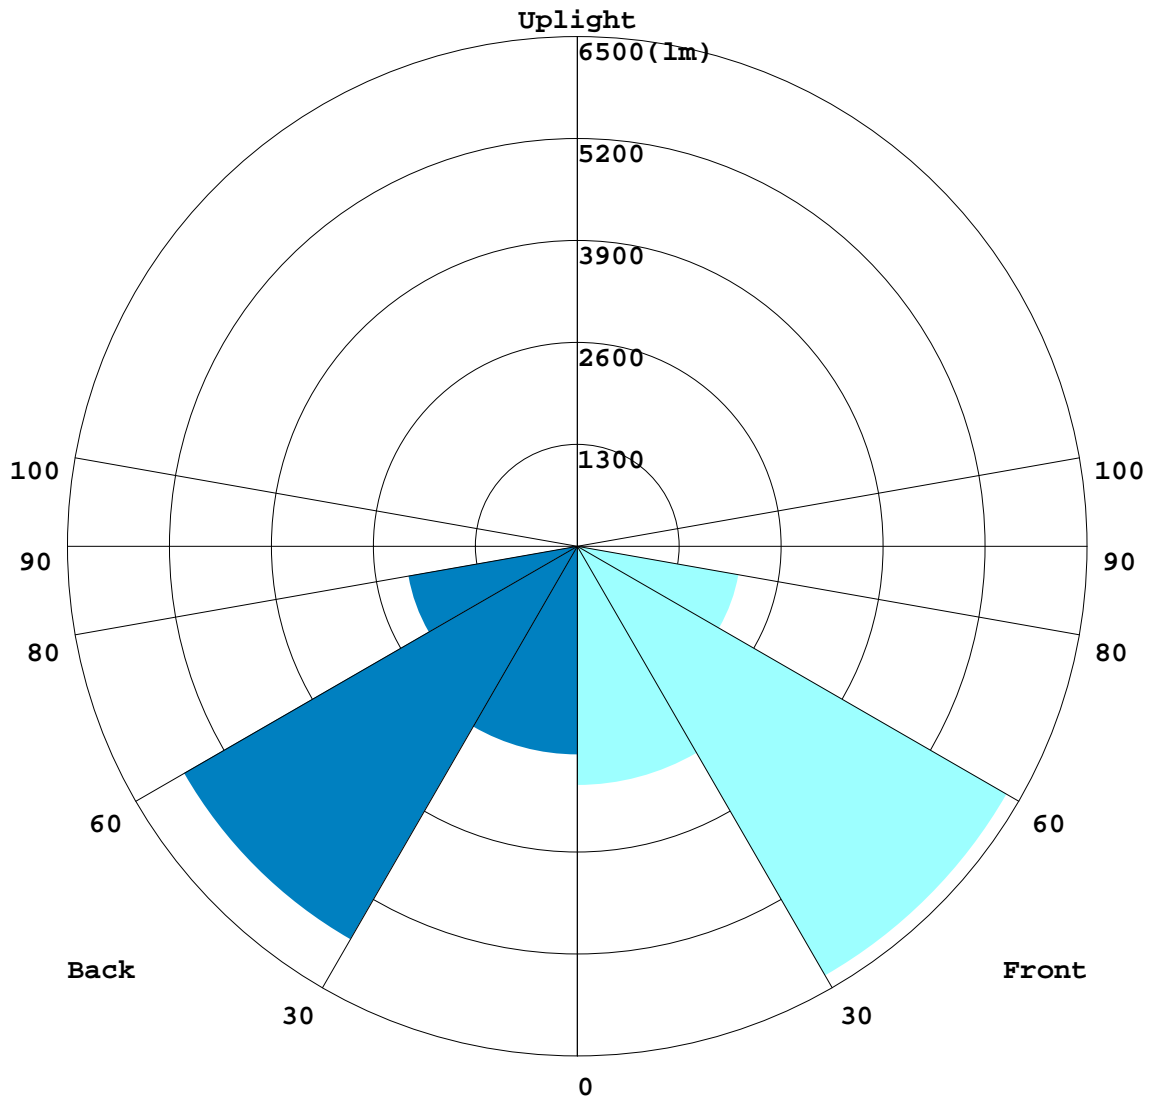

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

BUG REPORT

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

IESNA Luminaire Flux Distribution Table:

Zone	Lumens	Luminaire %
FL - Front-Low(0-30)	3047	13.7
FM - Front-Medium(30-60)	6324.2	28.5
FH - Front-High(60-80)	2089.1	9.4
FVH - Front-Very High(80-90)	31.484	0.1
Total Forward Light	11492	51.8

BL - Back-Low(0-30)	2656.6	12.0
BM - Back-Medium(30-60)	5790.1	26.1
BH - Back-High(60-80)	2186.1	9.8
BVH - Back-Very High(80-90)	72.121	0.3
Total Back Light	10705	48.2

UL - Uplight-Low(90-100)	0	0.0
UH - Uplight-High(100-180)	0	0.0
Total Up Light	0	0.0

BUG(Back,Up,Glare) Rating	B4-U0-G2
---------------------------	----------

Zone	Downward Lumens	Upward Lumens	Total Lumens
House Side	10705	0	10705
Street Side	11492	0	11492

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04


γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:



ROAD ISOCANDELA REPORT

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

ROAD SURFACE ISOCANDELA DIAGRAM

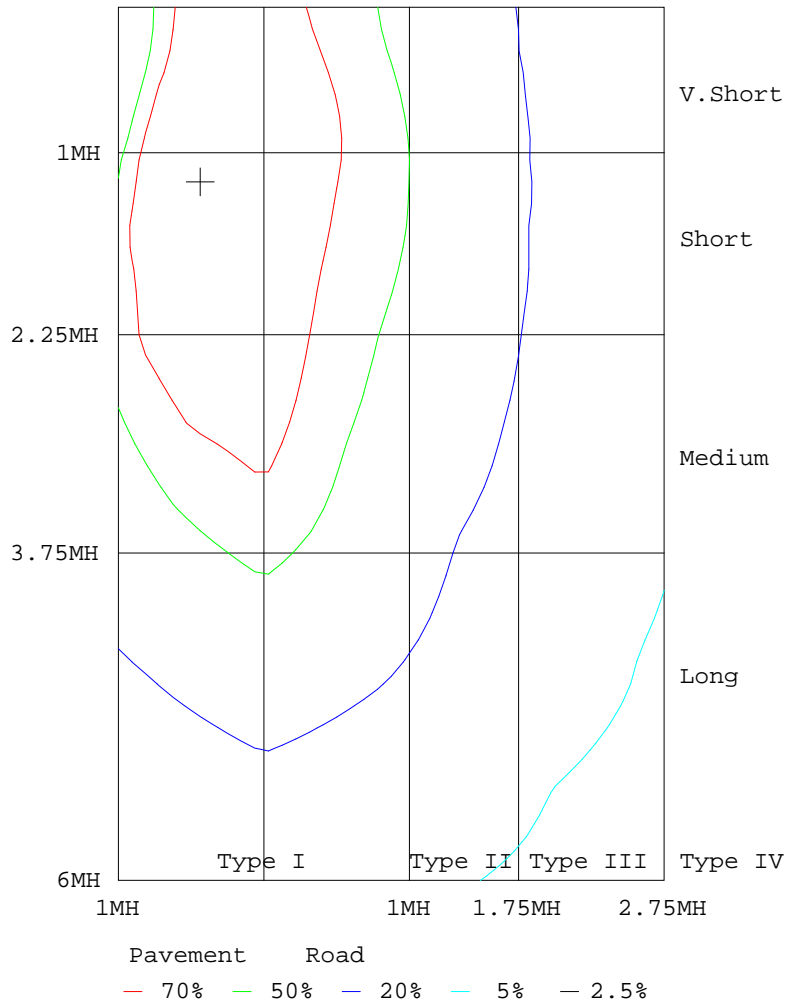

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SUR.:	Shielding Angle:N/A

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
0	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682
5	6687	6727	6744	6788	6812	6840	6859	6860	6888	6897	6903	6901	6884	6886	6866	6844	6828	6792	6769
10	6747	6805	6861	6928	6977	7028	7062	7078	7098	7121	7111	7114	7098	7102	7079	7048	7005	6940	6874
15	6864	6948	7035	7124	7167	7214	7220	7216	7209	7238	7240	7259	7278	7303	7314	7275	7244	7135	7048
20	7011	7163	7274	7350	7368	7353	7306	7218	7167	7156	7174	7262	7349	7455	7553	7573	7506	7384	7243
25	7164	7358	7537	7618	7562	7426	7260	7042	6912	6858	6896	7059	7271	7552	7774	7852	7790	7604	7422
30	7286	7543	7766	7828	7696	7382	7032	6661	6370	6261	6348	6630	7017	7501	7918	8073	8025	7807	7545
35	7384	7731	7947	7971	7750	7236	6553	5826	5276	5086	5248	5797	6487	7317	7946	8226	8217	7972	7642
40	7442	7874	8091	8070	7730	6875	5589	4330	3389	3058	3314	4194	5467	6864	7879	8324	8346	8108	7714
45	7451	7988	8206	8135	7544	6056	3790	2476	2072	1949	2032	2389	3555	5904	7610	8357	8469	8205	7740
50	7425	8032	8318	8141	6936	4327	2177	1583	1387	1327	1355	1525	2042	4094	6871	8311	8543	8292	7706
55	7356	8094	8372	7855	5774	2213	1197	941	860	833	834	889	1088	1961	5422	7943	8625	8360	7662
60	7252	8124	8271	6991	3477	830	661	615	574	554	560	595	634	749	2758	6820	8435	8397	7575
65	7049	7969	7504	4988	1221	510	449	412	376	357	366	398	430	485	1071	4192	7338	8134	7370
70	6494	6953	5618	2605	574	323	274	241	218	205	211	230	257	298	517	2086	4962	6662	6799
75	4881	4377	3005	1122	277	161	129	106	90.6	83.9	86.2	97.8	117	142	228	795	2315	3653	4778
80	1342	1072	785	299	86.9	50.5	33.9	23.1	18.7	17.0	17.0	19.9	26.9	38.8	61.3	173	468	679	1091
85	72.8	72.4	55.6	28.1	12.4	3.01	1.54	1.02	0.81	0.80	0.80	0.95	1.02	1.39	2.82	13.0	25.6	36.8	52.9
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.93V I:0.6920A P:147.92W PF:0.9720 Freq:50.01Hz Lamp Flux:22196.7x1 lm		
NAME: LED street light	TYPE:LED	WEIGHT:N/A
SPEC.:N/A	DIM.:	SERIAL No.:N/A
MFR.: Shenzhen Sinoco Lighting Technologies Co., Ltd.	SR.:	Shielding Angle:N/A

Table--2

UNIT: cd

C( DEG) γ (DEG)	190	200	210	220	230	240	250	260	270	280	290	300	310	320	330	340	350		
0	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682	6682		
5	6734	6700	6666	6641	6612	6583	6551	6537	6526	6524	6537	6529	6547	6575	6593	6627	6650		
10	6812	6742	6674	6594	6535	6470	6391	6377	6342	6331	6357	6376	6436	6484	6544	6622	6674		
15	6925	6796	6679	6548	6422	6313	6208	6138	6092	6083	6128	6194	6277	6392	6512	6624	6727		
20	7056	6863	6683	6476	6270	6090	5929	5813	5758	5752	5831	5945	6100	6285	6476	6669	6830		
25	7155	6898	6649	6373	6096	5838	5613	5465	5385	5389	5508	5662	5891	6153	6415	6688	6924		
30	7204	6875	6556	6232	5879	5544	5255	5084	4998	5004	5155	5368	5663	5998	6327	6655	6960		
35	7225	6818	6443	6055	5635	5218	4884	4676	4583	4597	4764	5030	5405	5817	6206	6578	6976		
40	7189	6707	6297	5841	5342	4863	4485	4228	4105	4137	4346	4664	5117	5605	6050	6494	6934		
45	7088	6537	6090	5567	4987	4456	3993	3658	3506	3570	3855	4256	4768	5346	5857	6328	6829		
50	6912	6292	5789	5163	4514	3915	3406	3070	2935	3000	3292	3744	4314	4983	5581	6092	6660		
55	6665	5946	5336	4599	3889	3263	2731	2422	2314	2381	2666	3154	3745	4460	5174	5765	6428		
60	6322	5440	4687	3831	3117	2459	2038	1783	1699	1769	2019	2429	3057	3756	4582	5302	6096		
65	5806	4670	3762	2904	2148	1633	1337	1197	1151	1193	1340	1638	2166	2905	3740	4611	5590		
70	4876	3499	2602	1735	1080	875	789	742	721	736	788	891	1116	1779	2651	3541	4757		
75	3269	1905	1139	618	496	497	484	456	442	453	485	502	517	670	1227	2038	3298		
80	719	440	358	293	283	287	272	269	268	272	277	294	298	314	389	498	854		
85	68.4	97.6	99.6	97.0	107	111	108	113	116	119	114	118	122	116	116	108	96.0		
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00		

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature:24.5DEG  
 Operators:William  
 Test Date:2019-01-04

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.0.366  
 Humidity:65.7%  
 Test Distance:26.000m [K=1.3825]  
 Remarks: