

ST-29-125WS



☆ Adopt BRIDGELUX LEDs with high efficacy >160 Lm/W. Luminaire's Efficiency >103LM/W.





☆ Up to 80% energy saving compared to traditional lamps

☆ Operating Temperature: -40 to 55 °C, 100,000 hours LED life.

☆ 采用普瑞发光效率160LM/W高亮led芯片，保证灯具光效达103LM/W以上。

☆ 超级节能输出流明高达103LM/W以上，比传统钠灯节能80%以上。

☆ 工作范围-40°C~55°C，灯具寿命高达10万小时。

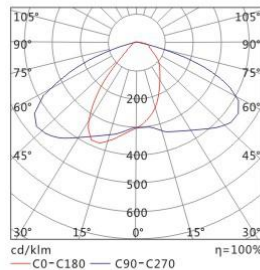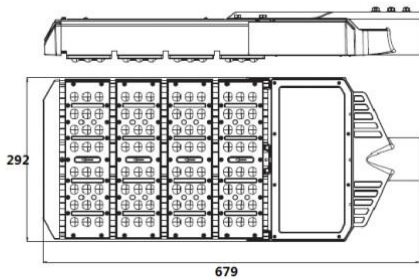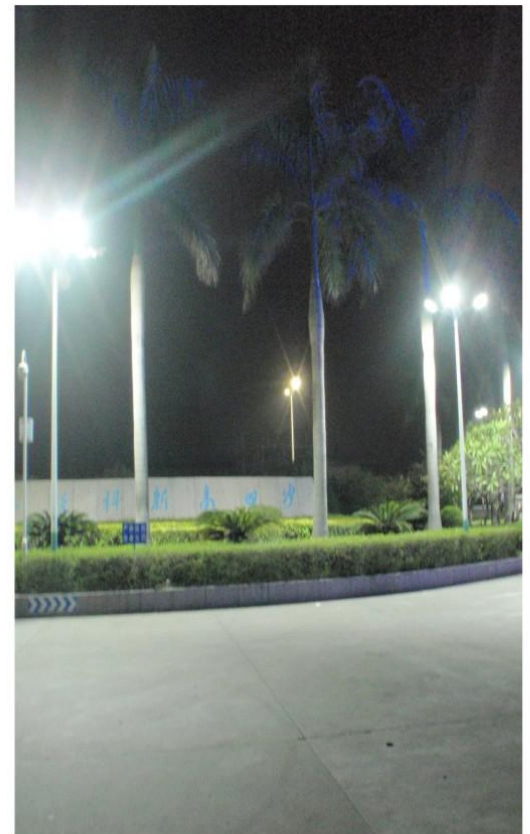

Watt 功率	Led efficacy 芯片光效	Luminaire's Efficiency 灯具光效	Luminous Flux 光通量	Input Voltage 输入电压	Color Temperature 色温	IP Grade 防护等级	Packing Size 外箱尺寸 1pcs/Carton(箱)
125W	160lm/W	103LM/W	12875M	AC85~277V DC12V 50/60 Hz	3500~7000K (customized)	IP65	86.5cmx39.5cmx13.5cm 10KG/Carton